

CS2

Compact Digital Photo Printer



The Sinfonia CS2 is one of the world's smallest and lightest photo printers, while still maintaining excellent print quality, durability, and fast print speed!

The compact design enables you to use this printer for your photo booth, mini kiosk, event photos, passport system, amusement and theme park photos, etc. The printer will produce a cut 4"x6" into two 2"x6" strips, perfect for photo booth applications. The Sinfonia CS2 printer will produce a 4"x6" print in under 11 seconds.

Designed for portability, the Sinfonia CS2 is compact and lightweight, weighing only 22 lbs. Perfect for mobile events or photo booths.


Features

- Lightweight and compact
- High mobility
- Superior image quality
- Speedy and reliable
- Matte finish available

Paper Sizes

- 4"x6"
- 5"x7"
- 6"x8"
- 2"x6" photo strips (cut from 4"x6")
- Optional square sizes: 5"x5", 6"x6"



1. LCD
2. Paper ejection slot
3. USB connector
4. Power switch
5. AC inlet

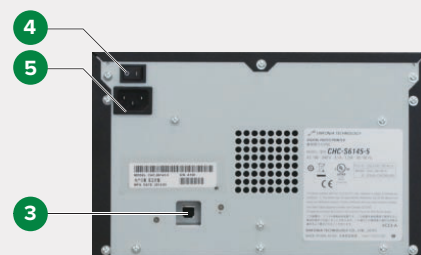

CS2 Photo Printer Specifications

Model No.	CHC-S6145
Print Method	Dye sublimation thermal transfer
Resolution	300 dpi
Paper Size Capacity	300 prints: 4" x 6" (102mm x 152mm)
	170 prints: 5" x 7" (127mm x 178mm)
	150 prints: 6" x 8" (152mm x 203mm)
Multiple prints	(6" x 4") x 2 with 6" x 8"
Print Speed	11 seconds: 4" x 6" (102mm x 152mm)
	17 seconds: 5" x 7" (127mm x 178mm)
	19 seconds: 6" x 8" (152mm x 203mm)
Ink Ribbon/Paper	YMC+OP / Roll Paper
Dimensions	10.7 in (W) x 6.61 in (H) x 13.82 in (D) 272 mm (W) x 168 mm (H) x 351 mm (D)
Weight	~22lbs (10kg)
Power Supply	AC100-240V, 50/60Hz auto-switching
Power Consumption	3.1A - 1.3A
Interface	USB 2.0
Buffer Memory	32MB
Safety Standards	UL, cUL, CE
EMI	FCC ClassA, VCCI ClassA
Printer Driver	Windows 11, 10, 8, 7, Vista, XP (32bit, 64bit)
Software Development Kit	DLL (Windows XP/Vista/7/8)

CS2 Dimensions

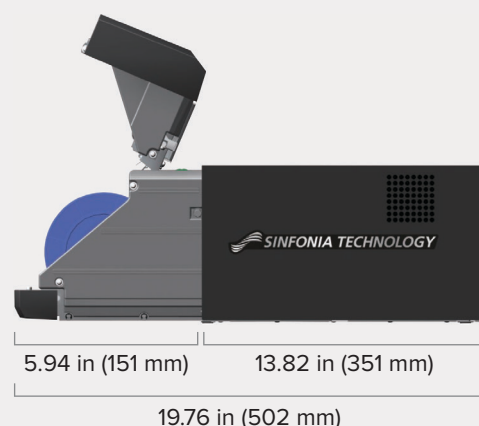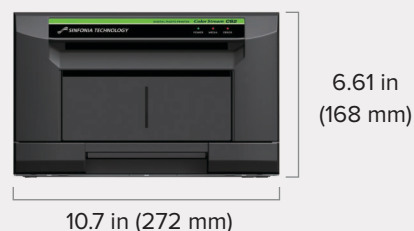

* Specifications subject to change without notice. Windows and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.



Before use, read the instruction manual carefully to ensure safe operation.
Do not position the printer in wet, humid, dusty or smoky environments. This may result in fire, breakdown or electric shock.